

Strobe Alert™ Compact Flash Alarm



Specifications

Supply voltage: LC09: 12-36 VDC
LC10: 120 VAC @ 50-60 Hz.
LC10-E: 240 VAC @ 50-60 Hz.

Consumption: 3 watts max

Strobe color: Amber

Strobe type: Xenon tube

Strobe flash: 1 per second

Strobe life: 10M cycles

Enclosure rating: NEMA 4X (IP65)

Enclosure material: Polycarbonate

Encl. compatibility: LC05, LC06, LC10 & LC11

Wire type: 2-wire, #22 AWG

Wire length: 5" (12.7 cm)

Classification: General purpose

Application


Offered in both AC and DC powered configurations, the compact flash alarm brings immediate attention to process conditions. The alarm is compatible with our round enclosures and may be actuated with any of our level switch, flow switch or relay control products. Specify the strobe supply voltage.

Features

High intensity amber flash alarm visually alerts on-site personnel
Rugged NEMA 4X polycarbonate enclosure for harsh environments
Mounts directly on any Flowline round NEMA 4X enclosure

Tech Tip

Strobe Alert is commonly applied in tank spill prevention, pump or process protection applications. Compatible with our round NEMA 4X controller or junction box enclosures, the alarm should be installed in a visible location. We recommend the use of secondary audible alarms in critical applications.

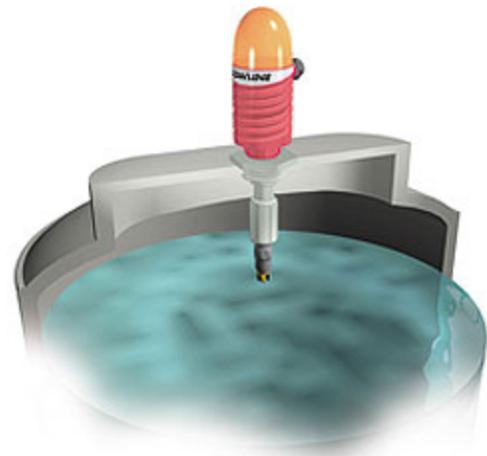

Order

Supply voltage (1) (2)
09 12-36 VDC
10 120 VAC

LC□□-1004

Ordering Notes

- 1) To factory configure the LC10-1004 for 240 VAC, place an E at the end of the P/N (ie: LC10-1004-E).
- 2) For field mount and conduit termination, order a LC06-10_1 junction box.

*203 Vest Avenue
Valley Park, MO 63088*

*Toll Free: (888) SPECTECH
Phone: (636) 537-0202*

*Fax: (636) 537-1405
E-Mail: sales@spectechind.com*